

WEDA D30 (50 Hz)

Product reference

Product code	WEDA D30
Installation	Portable Drainage pump
Discharge connection	3" std, 4" opt, hose, ISO-G or NPT thread
Hydraulic range	N - Normal Head
	L - Low Head
Solid handling	Strainer hole dimension 7mm
Liquid Temperature	max 40°C (104°F), standard
Depth of immersion	max 20 m (65 feet)
Liquid density	1100 kg/m ³ (9.2 lb. per US gal.)
pH of the pumped liquid	pH 5–8
Frequency	50 Hz
Insulation class	Class F (+155°C), IEC 85
Protection class	IP68
Voltage variation	max ± 5% of nominal voltage
Voltage imbalance	max 2% - between phases
Max start stop	max 30 - No. of starts/hour
Thermal contacts	140°C (284°F)
Cable	Oil and wear resistant rubber cable type HO7RN-F
	1 Ph: 20m 3G2.5 mm ² + plug (230V)
	3 Ph: 20m 4G1.5 mm ²
Outer casing	Aluminium
Impeller	Cr-alloyed white cast iron, 55±5 HRC
Wear parts	Nitrile rubber
Stator housing	Aluminum
Strainer	Hard Sole - Reinforced Polyethylene
Shaft	Stainless steel
O-rings	Nitrile rubber
Discharge connection	Aluminum
Bearings	Single row ball bearing with C3 clearance
	Primary seal: Silicon carbide against silicon carbide
	Secondary seal: Lip seal against wear sleeve
Mechanical seal	External Plug for Oil Inspection
	3" BSP female Camlock adaptor/coupling/ Storz coupling 75-B
Quick couplings	4" BSP female Storz coupling
	Built-in capacitor + contactor 1 Ph. Built-in contactor and rotation control for 3 ph
Start type	Float switch
Accessories	Zinc anodes
	Epoxy coating, Low suction collar


Weight and dimensions		Low head	Normal head
Weight (excl. cable)	kg	20	20
Height	mm	525	495
Width	mm	290	290
Diameter	mm	220	220



2960 2960 00 - Subject to modifications without prior notice.



Performance curve

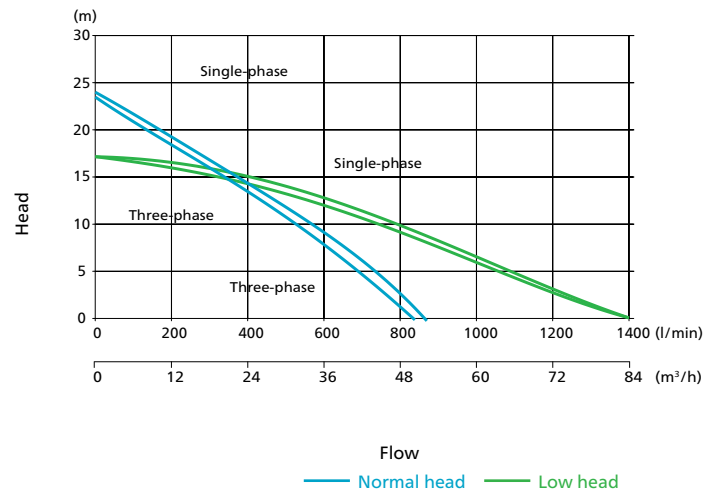

Power rating

Rated power (P2) 2,0 kW		
Voltage	Max. power consumption kW	Max. current A
230V / 1 Ph	2,6	11,0
230V / 3 Ph	2,5	7,3
400V / 3 Ph	2,5	4,0
500V / 3 Ph	2,5	3,6
690V / 3 Ph	2,7	2,6

Other voltages available on request

Atlas Copco

Atlas Copco AB
atlas copco.com

