

Strong Undercut Anchor FSU/FSU-P




DE Bedienungsanleitung
EN Operating instructions
FR Manuel d'utilisation
NL Gebruiksaanwijzing
IT Manuale d'uso
ES Manual de instrucciones
PT Instruções de utilização
DA Betjeningsvejledning
SV Bruksanvisning

NO Bruksanvisning
FI Käyttöohje
PL Instrukcja obsługi
CS Návod k obsluze
SK Používateľská príručka
HU Használati útmutató
RO Instrucțiuni de utilizare
SL Navodila za uporabo
HR Priručnik za rad


TR Kullanım Kılavuzu
EL Εγχειρίδιο χρήσης
BG Инструкции за работа
RU Руководство по эксплуатации
ZH 操作说明
JP 取扱説明書
KO 작동 지침

Strong Undercut Anchor FSU

Pre-setting anchor




		d_1 [mm]	d_{\leq} [mm]	t_{in} [mm]	T_{inst} [Nm]	U [mm]	SW [mm]				
567778	FSU M10x100/20	20	12	20	40	2-5	17	567793	FSU-SD 20x100	568881	FSU-ST M10
567779	FSU M10x100/20 R										
567782	FSU M12x125/30	22	14	30	80	3-6	19	567795	FSU-SD 22x125	568882	FSU-ST M12
567783	FSU M12x125/30 R										
567786	FSU M12x125/50	22	14	50	80	3-6	19	567795	FSU-SD 22x125	568882	FSU-ST M12
567787	FSU M12x125/50 R										

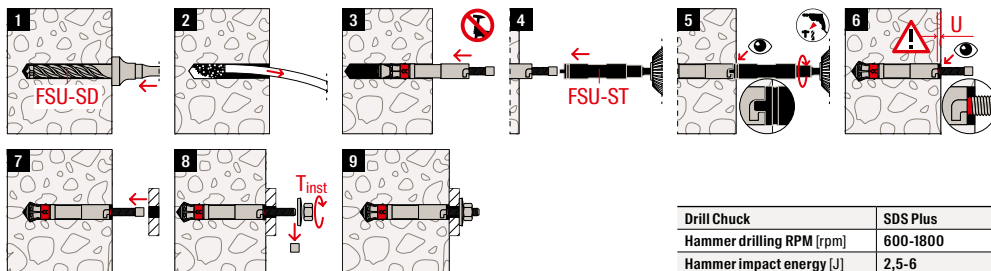


Drill Chuck	SDS Plus
Hammer drilling RPM [rpm]	600-1800
Hammer impact energy [J]	2,5-6

Strong Undercut Anchor FSU-P

Push-through anchor



		d_1 [mm]	d_{\leq} [mm]	t_{in} [mm]	T_{inst} [Nm]	U [mm]	SW [mm]				
567780	FSU-P M10x100/20	20	21	10-20	40	2-5	17	567794	FSU-SD 20x120	568881	FSU-ST M10
567781	FSU-P M10x100/20 R										
567784	FSU-P M12x125/30	22	23	12-30	80	3-6	19	567796	FSU-SD 22x155	568882	FSU-ST M12
567785	FSU-P M12x125/30 R										
567788	FSU-P M12x125/50	22	23	12-50	80	3-6	19	567797	FSU-SD 22x175	568882	FSU-ST M12
567789	FSU-P M12x125/50 R										

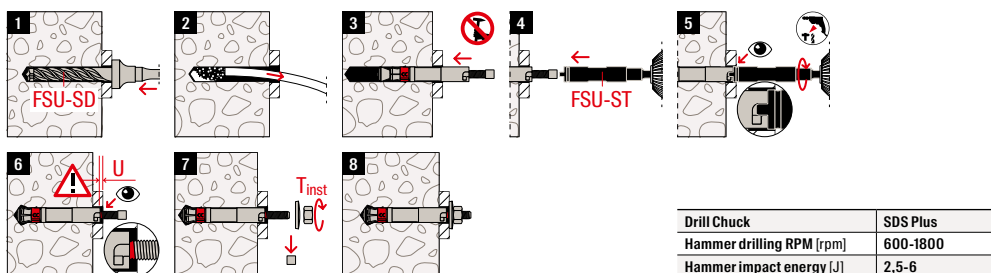

Drill Chuck	SDS Plus
Hammer drilling RPM [rpm]	600-1800
Hammer impact energy [J]	2,5-6

fischer

fischerwerke GmbH & Co. KG

Klaus-Fischer-Straße 1 · 72178 Waldachtal

Germany

P +49 7443 12-0

www.fischer-international.com · info@fischer.de



ETA-22/0674,
for cracked concrete



APPROVED



Fire resistance
classification R120